

# ELECTRONIC THERMOSTAT

ET 011 | DC 24 V



> 16 Amp DC switching capacity  
> Low hysteresis

> Wide adjustment range  
> DIN rail mountable




The ET 011 is an electronic thermostat for regulating high performance DC 24 V equipment. Heating or cooling equipment, as well as signal devices, can be switched via the SPDT (change-over) contact. A relatively small hysteresis sets the ET 011 Thermostat apart from less accurate mechanical thermostats.



## TECHNICAL DATA

Switching difference	5.4 °F (3 K) ±1.8 °F (1 K) tolerance at +68 °F (+20 °C)
Sensor element	PTC
Contact type	SPDT / change-over contact
Service life	> 100,000 cycles
Max. switching capacity	16 A @ DC 28 V
Max. inrush current	DC 16 A
Connection	5-pole terminal, clamping torque 0.5 Nm max.: solid wire – AWG 14 max. (2.5 mm <sup>2</sup> ) stranded wire <sup>1</sup> – AWG 16 max. (1.5 mm <sup>2</sup> )
Housing	plastic, UL 94V-0, light grey
Mounting	clip for 35 mm DIN rail, EN 60715
Mounting position	vertical
Operating / Storage temperature	-40 to +140 °F (-40 to +60 °C) / -49 to +176 °F (-45 to +80 °C)
Operating / Storage humidity	max. 90 % RH (non-condensing)
Dimensions	2.6 x 2.0 x 1.8" (67 x 50 x 46 mm)
Weight	approx. 2.4 oz. (70 g)
Protection type	IP20
Approvals	EAC

<sup>1</sup> When connecting with stranded wires, wire end ferrules must be used.

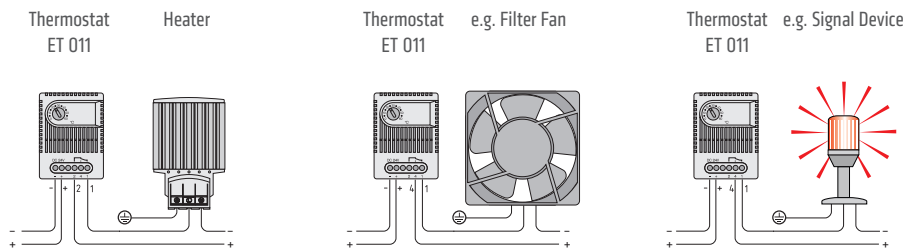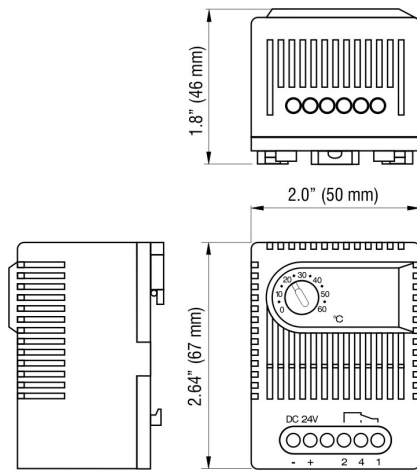

Wiring examples

Part No.	Operating voltage	Setting range
01190.0-00	DC 24 V (DC 20 – 28 V)	0 to 60 °C
01190.0-01	DC 24 V (DC 20 – 28 V)	32 to 140 °F