

# SLIMLINE LIGHT WITH ON/OFF SWITCH


## SL 025



- > Compact design
- > Electronic ballast
- > Optional integrated receptacle
- > Screw or magnet mount
- > Long-life energy saving lamp
- > On/off switch

The SL 025 light was designed to fit in tight spaces in enclosures. It features an optional integrated receptacle so that electrical devices (e.g. power tools) can be easily plugged in when needed. The standard light can be screw mounted in a variety of positions, or the light can be fitted with an available magnet mount.

Photo: Slimline light with on/off switch and integrated receptacle (Germany), Part No. 02520.0-00

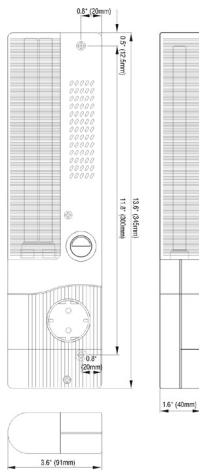

### TECHNICAL DATA

<b>Power consumption</b>	11 W (~ 75 W incandescent bulb)
<b>Luminosity</b>	900 Lm
<b>Lamp type</b>	compact fluorescent, 2G7 base, electronic ballast
<b>Service life</b>	10,000 hrs.
<b>Switch (for light only)</b>	on/off switch
<b>Connection</b>	3-pole terminal AWG 16 max. (2.5 mm <sup>2</sup> ) with strain relief only (cable not included), clamping torque 0.8 Nm max.
<b>Housing</b>	plastic, UL 94V-0, light grey
<b>Mounting</b>	M5 screws (not included), 11.8" (300 mm) hole distance or optional attached magnet (see part nos. below)
<b>Operating / Storage temperature</b>	-4 to +122 °F (-20 to +50 °C) / -49 to +158 °F (-45 to +70 °C)
<b>Operating / Storage humidity</b>	max. 90 % RH (non-condensing)
<b>Dimensions</b>	13.6 x 3.6 x 1.6" (345 x 91 x 40 mm)
<b>Weight</b>	approx. 0.9 lbs. (400 g), 1.3 lbs (600 g) with magnet
<b>Protection type</b>	IP20
<b>Note</b>	DC 24 – 48 V available upon request



Part No. with On/Off Switch	Model	Operating Voltage	Receptacle	Rec. max. current	Protection class	Approvals		
02520.0-00	without magnet	AC 230 V, 50/60 Hz	Germany/Russia	16 A	I (grounded)	VDE	-	EAC
02520.1-00	with magnet	AC 230 V, 50/60 Hz	Germany/Russia	16 A	I (grounded)	VDE	-	EAC
02521.0-00	without magnet	AC 230 V, 50/60 Hz	France/Poland	16 A	I (grounded)	VDE	-	EAC
02521.1-00	with magnet	AC 230 V, 50/60 Hz	France/Poland	16 A	I (grounded)	VDE	-	EAC
02522.0-00	without magnet	AC 230 V, 50/60 Hz	Switzerland	10 A	I (grounded)	VDE	-	EAC
02522.1-00	with magnet	AC 230 V, 50/60 Hz	Switzerland	10 A	I (grounded)	VDE	-	EAC
02523.0-00	without magnet	AC 230 V, 50/60 Hz	UK/Ireland	13 A	I (grounded)	VDE	-	EAC
02523.1-00	with magnet	AC 230 V, 50/60 Hz	UK/Ireland	13 A	I (grounded)	VDE	-	EAC
02524.0-01	without magnet	AC 120 V, 50/60 Hz	USA/Canada	15 A	I (grounded)	-	UL File No. E234324	EAC
02524.1-01	with magnet	AC 120 V, 50/60 Hz	USA/Canada	15 A	I (grounded)	-	UL File No. E234324	EAC
02527.0-00	without magnet	AC 230 V, 50/60 Hz	none	-	II (double insulated)	VDE	UL File No. E234324	EAC
02527.1-00	with magnet	AC 230 V, 50/60 Hz	none	-	II (double insulated)	VDE	UL File No. E234324	EAC
02527.0-10	without magnet	AC 120 V, 50/60 Hz	none	-	II (double insulated)	-	UL File No. E234324	EAC
02527.1-10	with magnet	AC 120 V, 50/60 Hz	none	-	II (double insulated)	-	UL File No. E234324	EAC